



TYPE PM LUMINAIRE AND CIRCUITRY

COMPONENTS

- 1 ELECTRICAL DISCONNECT MOUNTING RECEPTACLE
- 2 SAFETY CHAIN
- 3 ALUMINUM BALLAST HOUSING
- 4 ACRYLIC PRISMATIC REFRACTOR
- 5 ALUMINUM REFLECTOR
- 6 SS SPRING LATCHES
- 7 QUICK DISCONNECT WIRING COMPARTMENT
- 8 3/4" THREADED CONDUIT CONNECTION

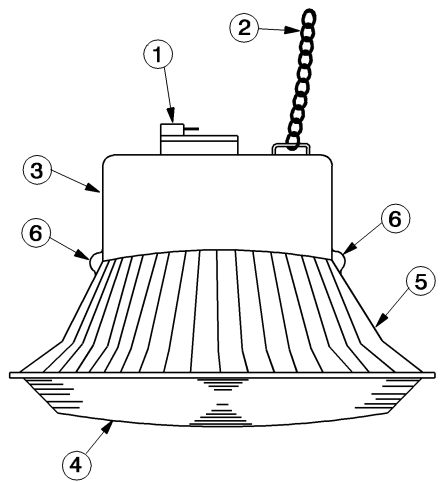

DETAIL "B"

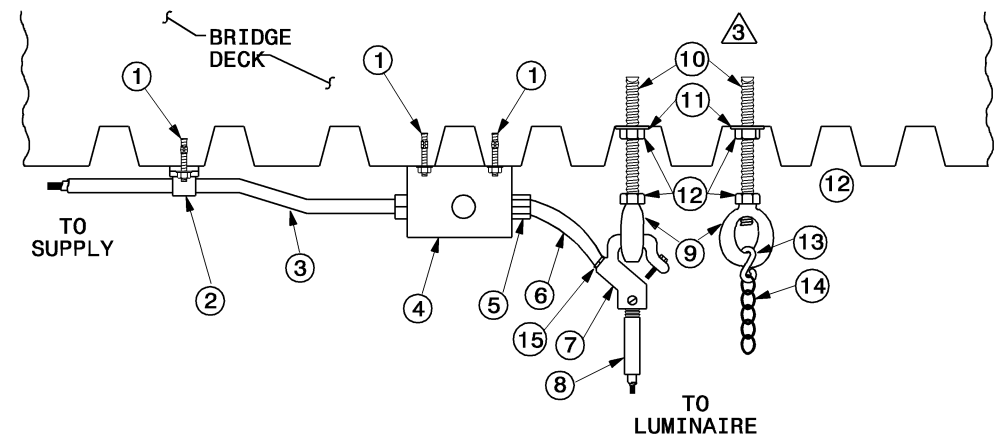

DETAIL "A"

COMPONENTS

- 1 1/4" SS WEDGE ANCHOR
- 2 STRAP WITH BACK
- 3 3/4" PVC CONDUIT
- 4 ROUND PVC BOX W/4-3/4" HUBS AND GASKETED COVER
- 5 CORD GRIP
- 6 3 COND. "SO" CORD (12 AWG 600 VAC)
- 7 HOOK, FEMALE
- 8 3/4" RGS COUNDUIT
- 9 3/8" GALV. EYE NUT
- 10 3/8" SS THREADED ROD AND ADHESIVE ANCHOR
- 11 3/8" SS FLAT WASHER
- 12 3/8" SS HEX NUT
- 13 CHAIN "S" LINK
- 14 SAFETY CHAIN
- 15 SEALER

NOTES

- 1 MOUNT TYPE PM LUMINAIRE FLUSH WITH BOTTOM OF BEAMS.
- 2 PROVIDE EXPANSION FITTINGS IN EACH SECTION OF CONDUIT THAT IS GREATER THAN 20' LONG BETWEEN TERMINALS AT JUNCTION BOXES OR PIER CAP.
- 3 REFER TO PROJECT SPECIAL PROVISIONS TITLED "ADHESIVELY ANCHORED ANCHOR BOLTS OR DOWELS" AND SHEET 2 OF 2.